



AH-0933

Mechanical Rate of Rise Heat Detector

Characteristics


- Detector is made of high endurance, solid and colorfast fire-proof plastic.
- Non-loosening screws on base terminal for easy installation.
- The unit is completely sealed; its function is not affected by humidity, dust or insects.
- This detector has passed strict quality control and repetitive testing, hence its quality is stable and highly reliable.

Specifications

Model	AH-0933
Type	2-wire
Voltage Range	12 ~ 30V DC
Alarm Current @24V DC 470Ω	40mA
Alarm Temperature	Comply to EN54
Ambient Temperature	0°C ~ +55°C
Material	Fire-proof plastic
Dimensions	102mm(Dia.) x 46mm(H)
Weight	About 130g
Color	White

Effective alert area

Construction/Height	Under 4M	4M ~ 8M
Fire-proof Building	90 M ²	45 M ²
Ordinary Building	50 M ²	30 M ²

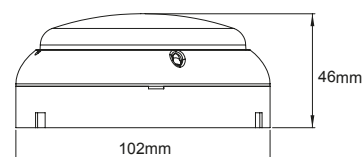

Distributor in Vietnam:

VIET BAO FIREFIGHTING AND PREVENTING EQUIPMENT COMPANY LIMITED.



140 Nguyen Van Thu St (Ground floor), DaKao ward, Dist.1, HCMC.

Tel: 84.28.39101156 – 39101157. Fax: 84.28.39101158

Email: vietbao@vietbaopccc.com.vn Website: <http://vietbaopccc.com.vn>